

## AC Low Noise Amplifier 13GHz-25GHz



### Product Description

RAMP13G25GSA is an AC low noise amplifier with a frequency range of 13 to 25GHz.

The power output of this amplifier is 5dBm typical. The typical gain is 20dB.

The AC amplifier uses a standard convenient 110V/220 VAC power supply.

### Features

- AC Low Noise Amplifier
- Gain 20dB Typical
- P1dB Output Power 5dBm Typical
- Supply Voltage 110/220 VAC
- 50 Ohm Matched Input / Output

### Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

### Electrical Specifications (T<sub>A</sub>=+25°C)

| Parameter                                     | Min   | Typ  | Max  | Units  |
|---|---|------|------|--------|
| Frequency Range                               | 13  |      | 25   | GHz    |
| Gain  | 16  | 21   | 26   | dB     |
| Gain Flatness                                 |   | -    |      | dB     |
| Gain Variation Over Temperature (-40°C~+85°C) |   | 0.03 | 0.04 | dB/ °C |
| Noise Figure                                  |   | 3.5  | 4.5  | dB     |
| Input Return Loss                             | 6   | 13   |      | dB     |
| Output Return Loss                            | 6   | 14   |      | dB     |
| Reverse Isolation                             | 39  | 45   |      | dB     |
| Output 1dB Compression Point (P1dB)           | 1   | 5    |      | dBm    |
| Saturated Output Power (Psat)                 | 3   | 8    |      | dBm    |
| Output Third Order Intercept (OIP3)           | 8   | 13   |      | dBm    |
| Supply Current (AC 110~220V)                  |   | 41   | 55   | mA     |
| Isolation S12                                 |   | -    |      | dB     |
| Weight  |   | -    |      | lbs.   |
| Impedance                                     |   | 50   |      | Ohms   |
| Input / Output Connectors                     | SMA-Female(Input) – SMA-Female(Output)                    |      |      |        |
| Package                                       | Epoxy Sealed (Standard)<br>Hermetically Sealed (Optional) |      |      |        |

**Absolute Maximum Ratings**

| Parameter              | Rating      |
|------------------------|-------------|
| Operating Voltage      | 110~240 VAC |
| *RF Input Power (RFIN) | -5dBm       |

**Bias Up Procedure**

1. Connect ground
2. Connect input and output with 50 Ohm source/load. (In band VSWR < 1.9:1 or >10dB return loss.)
3. Connect positive supply and make sure power supply can handle max current.

**Bias Down Procedure**

1. Turn off power supply and remove positive supply
2. Disconnect input and output with 50 Ohm source/load. (In band VSWR < 1.9:1 or >10dB return loss.)
3. Remove ground

**Environmental Specifications and Test Standards**


| Parameter                      | Description   |
|--------------------------------|---|
| Operational Temperature        | -40°C to +85°C<br>(Case Temperature)  |
| Storage Temperature            | -50°C to +105°C   |
| Thermal Shock                  | -40°C → +85°C<br>(5 Cycles / 10 hours)  |
| **Random Vibration             | MIL-STD-202G<br>Table 214-I, Test Condition Letter C<br>1.5 Hours Per Axis  |
| High Temperature Burn In       | Temperature +85°C for 72 Hours  |
| Shock                          | 1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s<br>2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s<br>3. Total 18 times (6 directions, 3 repetitions per direction). |
| Altitude                       | Standard: 30,000 Ft (Epoxy Sealed Controlled Environment)<br>Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)   |
| Hermetically Sealed (Optional) | MIL-STD-883 (For Hermetically Sealed Units)   |

\*Maximum RF input power is set to assure safety of amplifier. Input power may be increased at own risk to achieve full power of amplifier. Please reference gain and power curves.


\*\*For vibration testing details please see additional information section.

Typical Performance Plots


Gain vs. Temperature

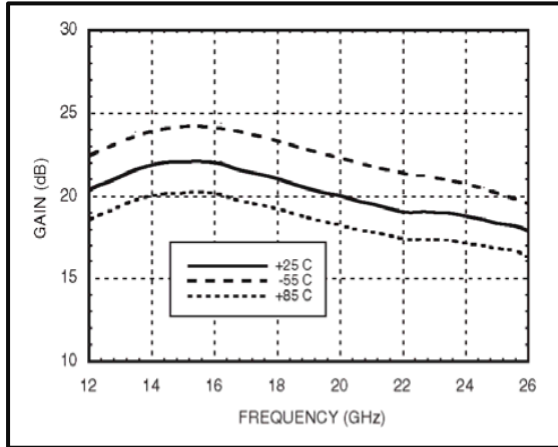


Return Loss

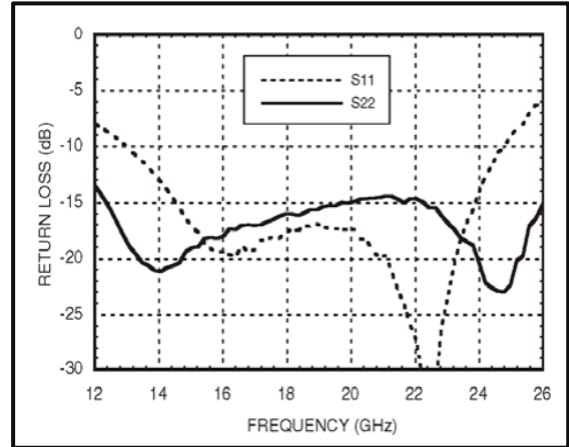


Noise Figure vs. Temperature

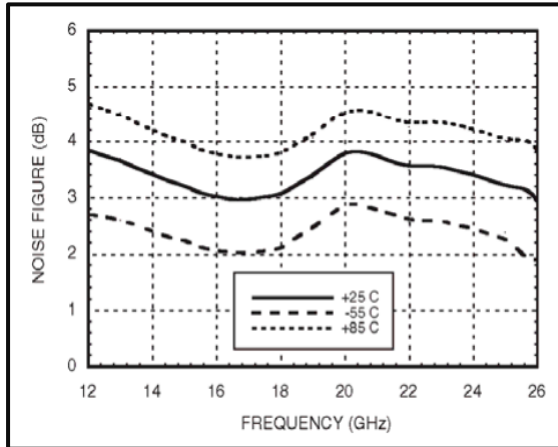


Output P1dB

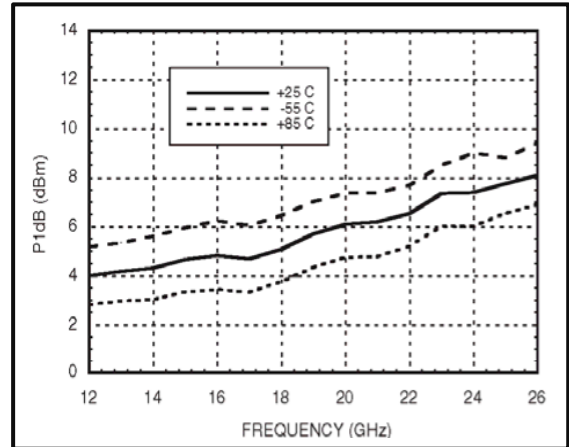


Output IP3

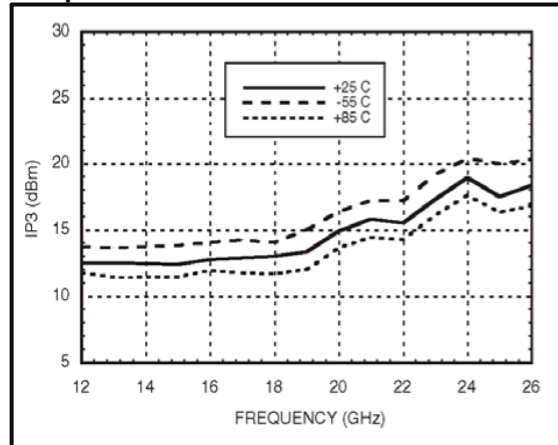

Gain & Noise Figures vs. Supply Voltage @ 18GHz

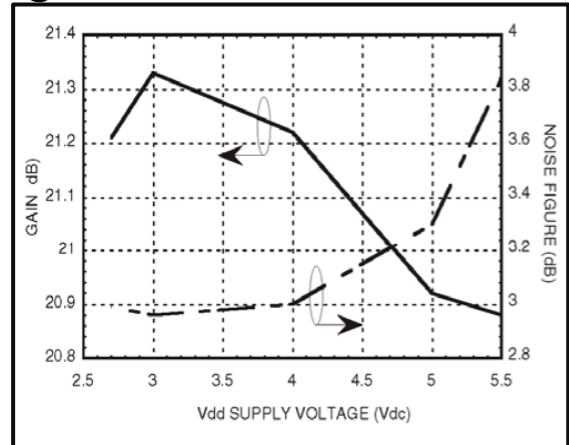

**Outline Drawing**

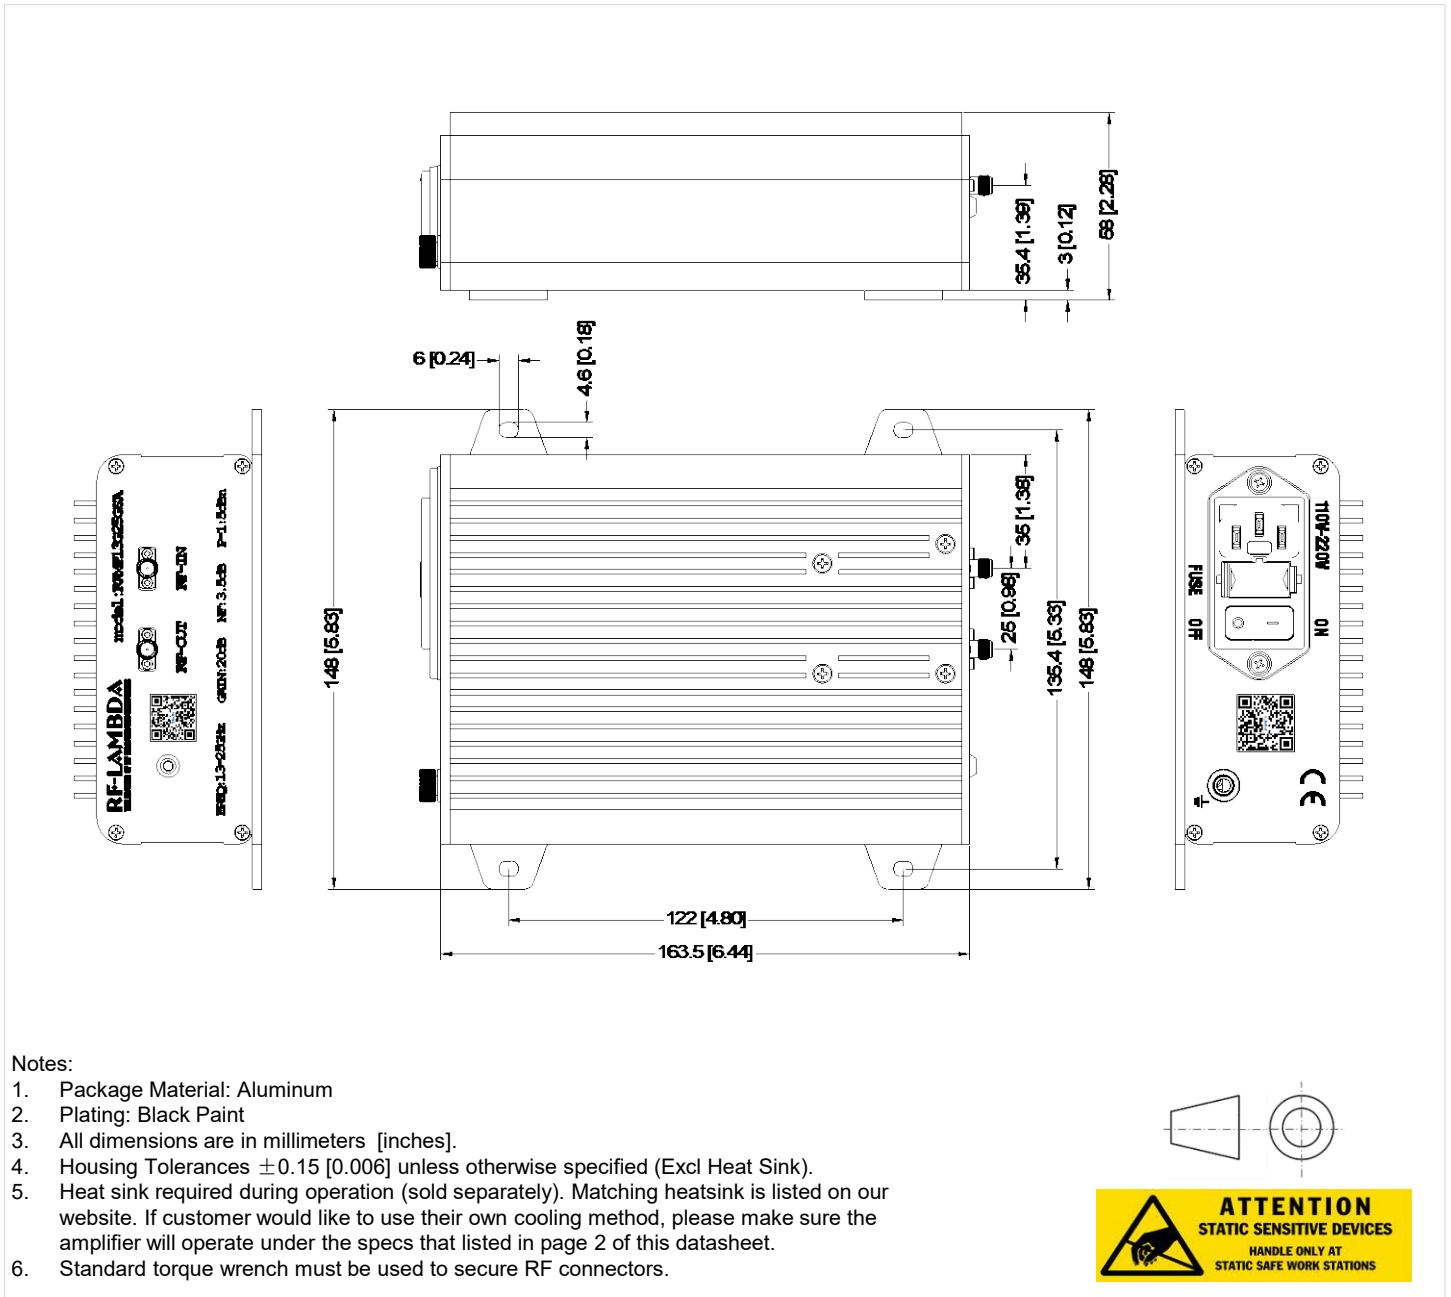

**Additional Information**

| Documentation                   | Webpage   |
|---------------------------------|---|
| ESD Policy                      | <a href="https://rflambda.com/pdf/rflambda_esd_control.pdf">https://rflambda.com/pdf/rflambda_esd_control.pdf</a>   |
| Heatsink Lookup Specifications  | <a href="https://rflambda.com/search_heatsink.jsp">https://rflambda.com/search_heatsink.jsp</a>   |
| Connector Torque Specifications | <a href="https://www.rflambda.com/pdf/Torque_Specifications.pdf">https://www.rflambda.com/pdf/Torque_Specifications.pdf</a>                                   |
| Random Vibration Test Standard  | <a href="https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf">https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf</a> |

**Ordering Information**

| Part Number  | Modification | Description                        |
|--------------|--------------|------------------------------------|
| RAMP13G25GSA | Standard     | 13GHz-25GHz AC Low Noise Amplifier |

**Amplifier Use**

Ensure that the amplifier input and output ports are safely terminated into a proper 50 ohm load before turning on the power. Never operate the amplifier without a load. A proper 50 ohm load is defined as a load with impedance less than 1.9:1 or return loss larger than 10dB relative to 50 Ohm within the specified operating band width.

Power Supply Requirements

Power supply must be able to provide adequate current for the amplifier. Power supply should be able to provide 1.5 times the typical current or 1.2 times the maximum current (whichever is greater).

In most cases, RF - Lambda amplifiers will withstand severe mismatches without damage. However, operation with poor loads is discouraged. If prolonged operation with poor or unknown loads is expected, an external device such as an isolator or circulator should be used to protect the amplifier.

Ensure that the power is off when connecting or disconnecting the input or output of the amp.

Prevent overdriving the amplifier. Do not exceed the recommended input power level.

Adequate heat-sinking required for RF amplifier modules. Please inquire.

Amplifiers do not contain Thermal protection, Reverse DC polarity or Over voltage protection with the exception of a few models. Please inquire.

Proper electrostatic discharge (ESD) precautions are recommended to avoid performance degradation or loss of functionality.

What is not covered with warranty?

Each RF - Lambda amplifier will go through power and temperature stress testing. Since the die, ICs or MMICs are fragile, these are not covered by warranty. Any damage to these will NOT be free to repair.

**Important Notice**

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.